


MPS2907A

SMALL SIGNAL TRANSISTORS (PNP)


TO-92

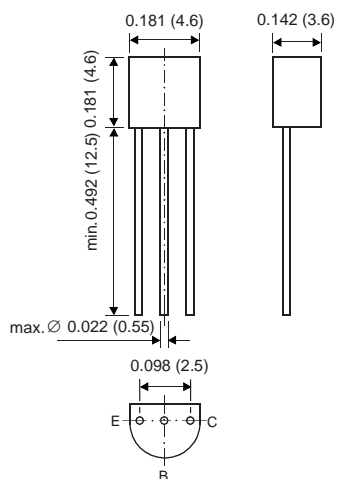

Dimensions in inches and (millimeters)

FEATURES

- ◆ PNP Silicon Epitaxial Planar Transistor for switching and amplifier applications.
- ◆ On special request, this transistor is also manufactured in the pin configuration TO-18.
- ◆ This transistor is also available in the SOT-23 case with the type designation MMBT2907A.



MECHANICAL DATA

Case: TO-92 Plastic Package**Weight:** approx. 0.18g

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	VALUE	UNIT
Collector-Base Voltage	$-V_{CBO}$	60	Volts
Collector-Emitter Voltage	$-V_{CEO}$	60	Volts
Emitter-Base Voltage	$-V_{EBO}$	5.0	Volts
Collector Current	$-I_C$	600	mA
Power Dissipation at $T_A = 25^\circ\text{C}$ Derate above 25°C	P_{tot}	625 5.0	mW mW/°C
Power Dissipation at $T_C = 25^\circ\text{C}$ Derate above 25°C	P_{tot}	1.5 12	mW mW/°C
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	200	°C/W
Thermal Resistance Junction Case	$R_{\theta JC}$	83.3	°C/W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_s	-500 to +150	°C

NOTES:

(1) Valid provided that leads are kept at ambient temperature.

MPS2907A

ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	MIN.	MAX.	UNIT
Collector-Base Breakdown Voltage at $-I_C = 10 \mu A$, $I_E = 0$	$-V_{(BR)CBO}$	60	—	Volts
Collector-Emitter Breakdown Voltage at $-I_C = 10 \text{ mA}$, $I_B = 0$	$-V_{(BR)CEO}$	60	—	Volts
Emitter-Base Breakdown Voltage at $-I_E = 10 \mu A$, $I_C = 0$	$-V_{(BR)EBO}$	5	—	Volts
Collector-Emitter Saturation Voltage at $-I_C = 150 \text{ mA}$, $-I_B = 15 \text{ mA}$	$-V_{CEsat}$	—	0.4	Volts
at $-I_C = 500 \text{ mA}$, $-I_B = 50 \text{ mA}$	$-V_{CEsat}$	—	1.6	Volts
Base-Emitter Saturation Voltage at $-I_C = 150 \text{ mA}$, $-I_B = 15 \text{ mA}$	$-V_{BEsat}$	—	1.3	Volts
at $-I_C = 500 \text{ mA}$, $-I_B = 50 \text{ mA}$	$-V_{BEsat}$	—	2.6	Volts
Collector Cutoff Current at $-V_{EB} = 0.5 \text{ V}$, $-V_{CE} = 30 \text{ V}$	$-I_{CEX}$	—	50	nA
Collector Cutoff Current at $-V_{CB} = 50 \text{ V}$, $I_E = 0$ at $-V_{CB} = 50 \text{ V}$, $I_E = 0$, $T_A = 150^\circ\text{C}$	$-I_{CBO}$	—	0.01 10	μA
Base Cutoff Current at $-V_{EB} = 0.5 \text{ V}$, $-V_{CE} = 30 \text{ V}$	$-I_{BL}$	—	50	nA
DC Current Gain at $-V_{CE} = 10 \text{ V}$, $-I_C = 0.1 \text{ mA}$	h_{FE}	75	—	—
at $-V_{CE} = 10 \text{ V}$, $-I_C = 1 \text{ mA}$	h_{FE}	100	—	—
at $-V_{CE} = 10 \text{ V}$, $-I_C = 10 \text{ mA}$	h_{FE}	100	—	—
at $-V_{CE} = 10 \text{ V}$, $-I_C = 150 \text{ mA}$	h_{FE}	100	300	—
at $-V_{CE} = 10 \text{ V}$, $-I_C = 500 \text{ mA}$	h_{FE}	50	—	—
Gain-Bandwidth Product at $-V_{CE} = 20 \text{ V}$, $-I_C = 50 \text{ mA}$, $f = 100 \text{ MHz}$	f_T	200	—	MHz
Output Capacitance at $-V_{CB} = 10 \text{ V}$, $f = 1 \text{ MHz}$, $I_E = 0$	C_{obo}	—	8.0	pF
Emitter-Base Capacitance at $-V_{EB} = 2.0 \text{ V}$, $f = 1 \text{ MHz}$, $I_E = 0$	C_{ibo}	—	30	pF

MPS2907A

ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	SYMBOL	MIN.	MAX.	UNIT
Turn-On Time at $-I_{B1} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 30 \text{ V}$	t_{on}	—	45	ns
Delay Time (See Fig. 1) at $-I_{B1} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 30 \text{ V}$	t_d	—	35	ns
Rise Time (See Fig. 1) at $-I_{B1} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 30 \text{ V}$	t_r	—	35	ns
Turn-Off Time at $-I_{B1} = -I_{B2} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 6 \text{ V}$	t_{off}	—	100	ns
Storage Time (See Fig. 2) at $I_{B1} = -I_{B2} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 6 \text{ V}$	t_s	—	225	ns
Fall Time (See Fig. 2) at $I_{B1} = -I_{B2} = 15 \text{ mA}$, $-I_C = 150 \text{ mA}$, $-V_{CC} = 6 \text{ V}$	t_f	—	75	ns

SWITCHING TIME EQUIVALENT TEST CIRCUIT

FIGURE 1 - DELAY AND RISE TIME TEST CIRCUIT

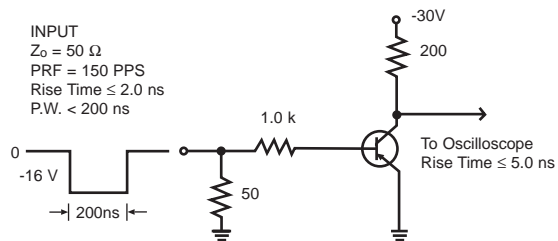


FIGURE 2 - STORAGE AND FALL TIME TEST CIRCUIT

