



# 27EP4

## CATHODE-RAY TUBE

**27EP4**  
**ET-T1182**  
Page 1  
10-54

**27-INCH RECTANGULAR, GLASS**  
**FOCUS—MAGNETIC**  
**DEFLECTION—MAGNETIC**  
**90-DEGREE DEFLECTION ANGLE**

**24- BY 18½-INCH PICTURE SIZE**  
**FACEPLATE—SPHERICAL, GRAY**  
**ION-TRAP GUN**  
**ALUMINIZED SCREEN**

---

### DESCRIPTION AND RATING

---

The 27EP4 is a magnetic-focus and deflection, direct-view all-glass picture tube which provides a 24- by 18½-inch picture for television applications. The electron gun is designed for use with an external single-field ion-trap magnet. Other features of this tube include a high-quality gray faceplate which increases picture contrast and detail under high-ambient-light conditions, a reflective aluminized screen to increase light output, and a space-saving rectangular face shape.

#### GENERAL

##### ELECTRICAL

Heater Voltage . . . . . 6.3 Volts  
Heater Current . . . . .  $0.6 \pm 10\%$  Amperes

Focusing Method—Magnetic

Deflecting Method—Magnetic

Deflection Angle, approximate

Diagonal . . . . . 90 Degrees  
Horizontal . . . . . 85 Degrees  
Vertical . . . . . 70 Degrees

Direct Interelectrode Capacitances, approximate

Cathode to All Other Electrodes . . . . . 5  $\mu\text{f}$   
Grid-No. 1 to All Other Electrodes . . . . . 6  $\mu\text{f}$

##### OPTICAL

Phosphor Number—P4, Sulfide Type

Fluorescent Color—White

Phosphorescent Color—White

Persistence—Short

Faceplate—Gray

Light Transmission at Center, approximate . . . . . 68 Percent

**MECHANICAL**

Over-all Length . . . . .  $23\frac{1}{16} \pm \frac{3}{8}$  Inches

Greatest Bulb Dimensions

Diagonal . . . . .  $26\frac{13}{16} \pm \frac{1}{8}$  Inches

Width . . . . .  $25\frac{9}{32} \pm \frac{1}{8}$  Inches

Height . . . . .  $20\frac{7}{32} \pm \frac{1}{8}$  Inches

Minimum Useful Screen Dimensions

Diagonal . . . . .  $25\frac{3}{4}$  Inches

Width . . . . . 24 Inches

Height . . . . .  $18\frac{1}{2}$  Inches

Neck Length . . . . .  $7\frac{1}{2}$  Inches

Bulb Number, ASA Designation—J214- $\frac{1}{2}$ -A1

Bulb Contact—Recessed Small-cavity Cap, JETEC No. J1-21

Base—Small-shell Duodecal 5-Pin, JETEC No. B5-57

Basing, JETEC Designation—12D

Bulb Contact Alignment

Anode Contact Aligns with Pin No. 6 Position  $\pm 30$  Degrees

Mounting Position—Any

Net Weight, approximate . . . . . 44 Pounds

**MAXIMUM RATINGS****DESIGN-CENTER VALUES\***

Anode Voltage† . . . . . 20,000 Max Volts DC

Grid-No. 2 Voltage . . . . . 500 Max Volts DC

Grid-No. 1 Voltage

Negative-Bias Value . . . . . 125 Max Volts DC

Positive-Bias Value . . . . . 0 Max Volts DC

Positive-Peak Value . . . . . 2 Max Volts

Peak Heater-Cathode Voltage‡

Heater Negative with Respect to Cathode

During Warm-up Period not to Exceed 15 Seconds . . . . . 410 Max Volts

After Equipment Warm-up Period . . . . . 180 Max Volts

Heater Positive with Respect to Cathode . . . . . 180 Max Volts

**TYPICAL OPERATING CONDITIONS**

Anode Voltage§ . . . . . 16,000 Volts DC

Grid-No. 2 Voltage . . . . . 300 Volts DC

Grid-No. 1 Voltage¶ . . . . . -28 to -72 Volts DC

Focusing-Coil Current▲, approximate . . . . . 116 Milliampères DC

Ion-Tap Field Intensity◆, approximate . . . . . 40 Gauss

**MAXIMUM CIRCUIT VALUES**

Grid-No. 1 Circuit Resistance . . . . . 1.5 Max Megohms

\*The maximum ratings provide a ten-percent safety factor in accordance with the standard design-center system of rating cathode-ray tubes. The tube will withstand the combined effects of variations in line voltages and components provided the maximum design-center values are not exceeded by more than ten percent.

†Anode and grid-No. 3 which are connected together within the tube are referred to herein as anode.

If this tube is operated at voltages in excess of 16,000 volts, x-ray radiation shielding may be necessary to avert possible danger of personal injury from prolonged exposure at close range. The protective face-viewing window of apparatus using tubes of this type may provide such a safeguard. If the radiation measured in contact with this window does not exceed 6.25 milliroentgens per hour, the window will normally provide adequate protection.


‡Cathode should be returned to one side or to the midtap of the heater transformer winding.

§Brightness and focus quality decrease with decreasing anode voltage. In general, the anode voltage should not be less than 14,000 volts.

¶For visual extinction of focused raster.

▲For JETEC focusing coil No. 109 with distance from the yoke-reference-line to center-of-air-gap equal to  $3\frac{3}{4}$  inches.

♦Single-field ion-trap magnet adjusted to optimum position, equivalent to 40 milliamperes through JETEC ion-trap magnet No. 117.

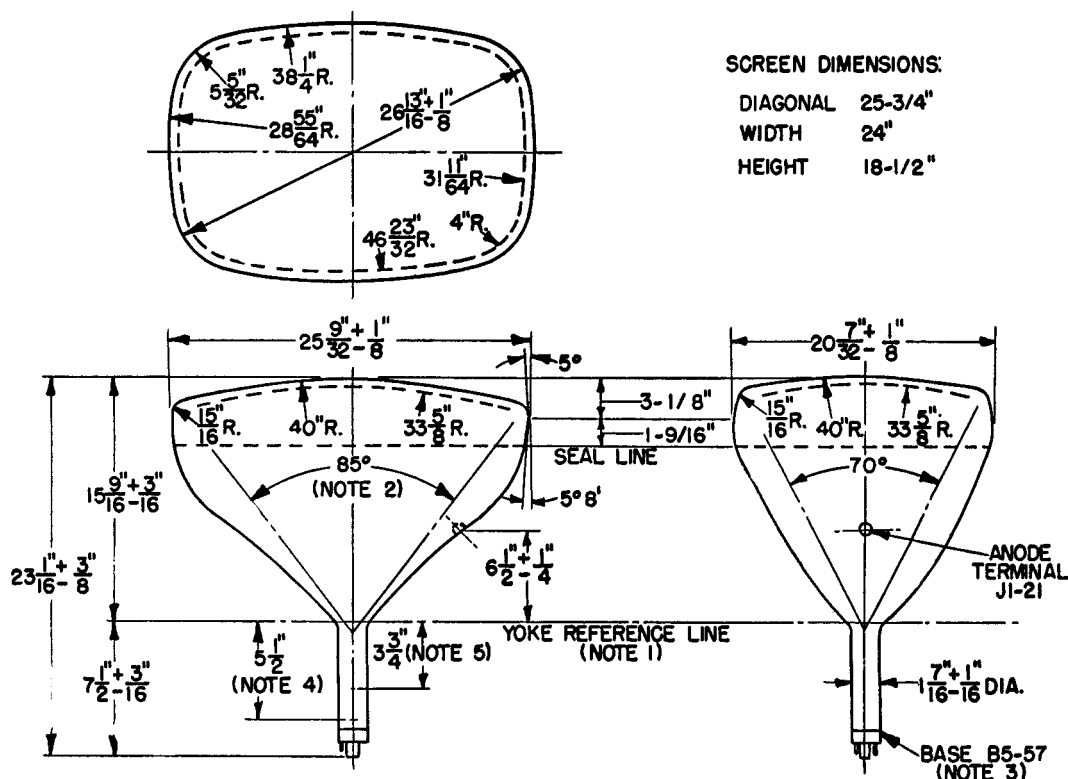

#### NOTES:

1. REFERENCE LINE IS DETERMINED BY THE PLANE OF THE UPPER EDGE OF THE SHOULDER OF THE REFERENCE-LINE GAGE (RETMA NO. 116) WHEN THE GAGE IS RESTING ON THE CONE.
2. DEFLECTION ANGLE ON DIAGONAL IS 90 DEGREES.
3. ANODE TERMINAL ALIGNS WITH PIN-NO. 6 POSITION  $\pm 30$  DEGREES.
4. APPROXIMATE POSITION OF ION-TRAP MAGNET.
5. RECOMMENDED POSITION FOR CENTER OF FOCUSING FIELD.

