Manuals+ — User Manuals Simplified.



GOSSEN METRAWATT Z270U USB PD Power Pack User Manual

Home » GOSSEN METRAWATT » GOSSEN METRAWATT Z270U USB PD Power Pack User Manual 🛸



Contents 1 Safety Instructions 2 Utilized Symbols 3 Technical Data 4 Use 5 Documents / Resources 5.1 References

Safety Instructions

Observe this documentation, in particular all included safety information, in order to protect yourself and others from injury, and to prevent damage to the product.

- Carefully and completely read and adhere to the documentation for the devices to be charged.
- Use the power pack in undamaged condition only. Pay particular attention to damage.
- Do not use the power pack after long periods of storage under unfavorable conditions (e.g. humidity, dust or extreme temperature).
- Only use the power pack in compliance with the specified technical data.
- Always use the plug attachment that matches the existing socket.
- Use only the interchangeable plug attachments furnished with the device.

Intended Use / Use for Intended Purpose

The USB PD power pack Z270U is exclusively intended for charging and operating suitable USB devices.

Use for Other than Intended Purpose

Use of the product for any purposes other than those described in this supplement, or in the documentation for the devices to be operated, is contrary to use for intended purpose.

Liability and Guarantee

Gossen Metrawatt GmbH assumes no liability for property damage, personal injury or consequential damage resulting from improper or incorrect use of the product, in particular due to failure to observe the product documentation. Furthermore, all guarantee claims are rendered null and void in such cases.

Opening the Accessory / Repairs

Unauthorized modification or opening of the accessory is prohibited.

Utilized Symbols

	The product may only be used in dry rooms.
FC	Federal Communications Commission (FCC) conformity marking
CE	European conformity marking
	Efficiency level VI according to US Department of Energy (DoE)
	Protection class 2
	The power pack may not be disposed of with household trash. Dispose of the pr oduct in compliance with the applicable statutory regulations.
c	Safety approval seal Electrical Testing Laboratories (ETL)

Technical Data

Dimensions: (L × W × H)	53 mm × 53 mm ×29.5 mm
Weight:	Approx. 145 g
Terminals:	USB-A USB-C
Input:	AC 100-240 V~50/ 60 Hz, 1.5 A Max.
USB-A output:	5.0 V === 3.0 A 9.0 V === 2.0 A 12.0 V === 1.5 A
USB-C output:	5.0/9.0 V === 3.0 A 12.0/15 V === 3.0 A 20.0 V === 3.25 A 5.0~ 21.0 V === 3.0 A
Total power:	Max. 65 W
Operating conditions:	0 °C…+40 °C 5% … 90% rF
Storage conditions:	20 °C…+85 °C 0% … 95% rF

Scope of Delivery

1	USB PD power pack Z270U type A (US)
1	Plug attachment type C (EU)
1	Plug attachment type G (UK)
1	Plug attachment type I (AU)
1	Supplement (this document)

Use

- 1. Prepare the plug at the power pack for the existing socket:
 - US: Unfold the plug on the product.
 - EU, UK, AU: Fold in the plug on the product.

Fit the required plug attachment onto the retracted plug.

- 2. Plug the power pack into the socket.
- 3. Connect the USB device to be operated to the suitable USB port of the power pack using a matching USB cable.

© Gossen Metrawatt GmbH

Prepared in Germany


• Subject to change, errors excepted

• PDF version available on the Internet

All trademarks, registered trademarks, logos, product names, and company names are the property of their respective owners.



Documents / Resources

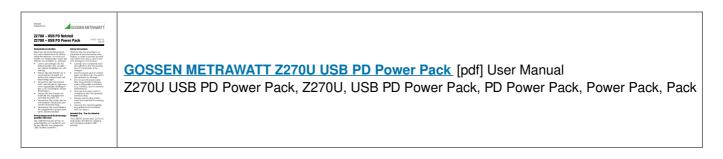

References

O GOSSEN METRAWATT, GMC-I Messtechnik, GMC-Instruments

Manuals+,