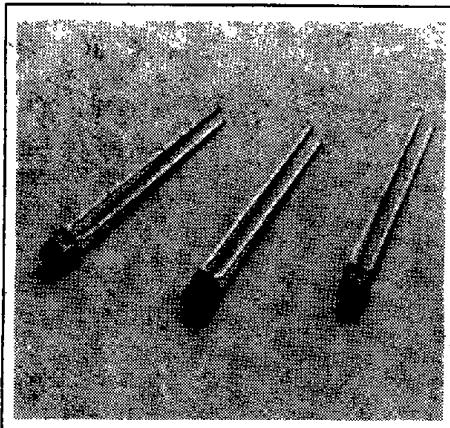
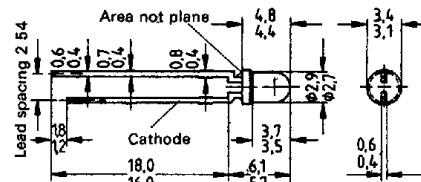


**SIEMENS**

T-41-21

**SUPER-RED LS 3180****YELLOW LY 3180****GREEN LG 3180****T1 (3 mm) WIDE ANGLE LED LAMP**

Package Dimensions mm

**FEATURES**

- Colors: Super-Red, Yellow, Green
- Lens: Red Diffused, Yellow Diffused, Green Diffused
- Low Power Dissipation
- Low Self-Heating
- Rigid Construction
- Suitable for Multiplex Operation
- Wide Angle 100°
- Cathode: Shorter Solder Tab

**DESCRIPTION**

The LS/LY/LG 3180 are T1 (3 mm) wide angle LED lamps. The 3 mm plastic package has colored diffused lenses to match the emission color, 2.54 mm lead spacing, and solder tabs (17 mm).

Applications include switching and ON/OFF displays, and back lighting.

**Maximum Ratings**

Reverse Voltage ( $V_R$ )	.....	.....	.....	.....	.....	5 V
Forward Current ( $I_F$ )	.....	.....	.....	.....	.....	45 mA
Surge Current ( $I_{F\text{sg}}$ ), $t \leq 10 \mu\text{s}$	.....	.....	.....	.....	.....	1 A
Operating Temperature ( $T_{op}$ )	.....	.....	.....	.....	.....	-55°C to +100°C
Storage Temperature ( $T_{sto}$ )	.....	.....	.....	.....	.....	-55°C to +100°C
Junction Temperature ( $T_J$ )	.....	.....	.....	.....	.....	+100°C
Power Dissipation ( $P_{D\text{tot}}$ ), $T_A=25^\circ\text{C}$	.....	.....	.....	.....	.....	150 mW
Thermal Resistance: Junction/Air ( $R_{ThJA}$ )	.....	.....	.....	.....	.....	500 K/W

**Characteristics ( $T_A=25^\circ\text{C}$ )**

Parameter	Symbol	LS 3180 Super-Red	LY 3180 Yellow	LG 3180 Green	Unit		
Wavelength at Peak Emission ( $I_F=20 \text{ mA}$ )	$\lambda_{\text{PEAK}}$	635	586	565	nm		
Dominant Wavelength	$\lambda_{\text{DOM}}$	628	590	567	nm		
Viewing Angle at 50% $I_V$	$\psi$	100	100	100	Deg.		
Forward Voltage ( $I_F=10 \text{ mA}$ )	$V_F$	2.0 (52.6)	2.0 (52.6)	2.0 (52.6)	V		
Reverse Current ( $V_R=5 \text{ V}$ )	$I_R$	0.01 (≤10)	0.01 (≤10)	0.01 (≤10)	μA		
Capacitance ( $V_R=0 \text{ V}$ , $f=1 \text{ MHz}$ )	$C_0$	12	10	45	pF		
Switching Times ( $I_F=100 \text{ mA}$ , $t=10 \mu\text{s}$ )							
Rise Time of $I_V$							
$I_V$ from 10% to 90%	$t_R$	300	300	1000	ns		
Fall Time of $I_V$							
$I_V$ from 90% to 10%	$t_f$	150	150	450	ns		
Luminous Intensity $I_V$ (mcd)*							
Part Number	Min.	Max.	Test Condition	Part Number	Min.	Max.	Test Condition
LS 3180-GK	1.6	12.5	10 mA	LY 3180-HL	2.5	20	10 mA
LS 3180-H	2.5	5	10 mA	LY 3180-J	4	8	10 mA
LS 3180-J	4	8	10 mA	LG 3180-EH	0.63	5	10 mA
LS 3180-JM	4	32	10 mA	LG 3180-G	1.6	3.2	10 mA
LS 3180-K	6.3	12.5	10 mA	LG 3180-GK	1.6	12.5	10 mA
LY 3180-FJ	1	8	10 mA	LG 3180-H	2.5	5	10 mA
LY 3180-G	1.6	3.2	10 mA				
LY 3180-H	2.5	5	10 mA				

\* Luminous intensity factor of  $I_V$  of one packaging unit  $\frac{I_{V\text{ MAX}}}{I_{V\text{ MIN}}} \leq 2$

See graph numbers 1, 2D, 3E, 4A, 5D, 6A, 7A, 8, 9, 10 on pages XX.