

ViewSonic® VP211b LCD Display

21.3" ThinEdge™ Ultra-Slim Bezel Display



ViewSonic®
See the difference.™



Experience the freedom of this ultra-slim fully adjustable 21.3" LCD.

Free your imagination with the VP211b premium large-screen LCD display. Framed by the state-of-the-art **THINEDGE ULTRA-SLIM BEZEL**, the VP211b showcases an expansive 21.3" picture with XtremeView® wide viewing angles, UXGA 1.92 megapixel resolution, ClearMotiv™ broadcast-quality video response technology, and pure HDTV high-scan 720p compatibility. Free from thick obtrusive bezels and infinitely configurable with **HEIGHT/PIVOT ADJUSTMENTS, DIGITAL/ANALOG INPUTS AND USB 2.0** high-speed connections, the VP211b LCD agilely displays your work or play any way you want to see it. Perfect for multiple-display installations or single workstations, the VP211b is the ultimate professional LCD display.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Immaculate pictures, ultimate versatility and unlimited possibilities.

→ ThinEdge maximizes your productivity

The ultra-slim 0.85" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

→ Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

→ Pivot, height and wall-mount versatility

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot, height, tilt and swivel adjustments.

→ **OPTISYNC** analog/digital inputs and integrated USB hub expand your connectivity

Includes one DVI-I (analog or digital capable) and one analog input for wide compatibility with, and optimization of, a variety of video sources. Integrated USB 2.0 high-speed hub enables unlimited connectivity options.

→ Integrated power supply with hard power switch

→ TCO'99 and ENERGY STAR®

→ 1600x1200 native resolution

Incredible image detail for video and graphics. Sharpness function improves graphics and text at lower resolutions.

→ High brightness and contrast

250-nit brightness (typ) and 600:1 contrast ratio (typ) for rich images.

→ HDTV-720p ready

→ ClearMotiv technology

Super-fast 25ms video response for broadcast-quality full motion video at 40 FPS.

→ Image clarity from all directions

XtremeView performance features ultra-wide 170° viewing angles horizontally and vertically.



ThinEdge

ViewSonic® VP211b LCD Display

21.3" ThinEdge™ Ultra-Slim Bezel Display




Pivot feature saves time

Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



Wide-travel height adjustment

With over 4 1/4 inches of travel, this LCD fits just right.

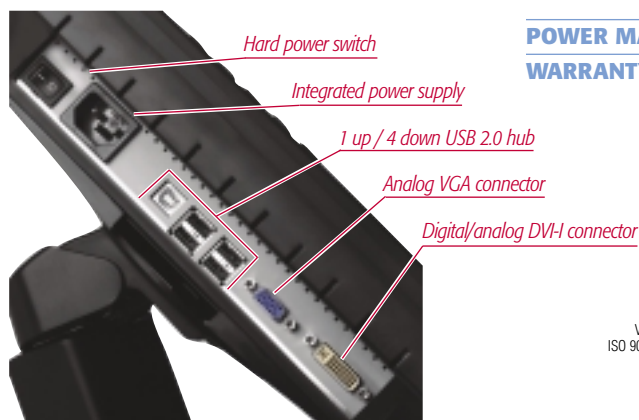

LCD PANEL

Type	21.3" color TFT active matrix UXGA LCD
Display Area	17.0" (horizontal) x 12.8" (vertical); 21.3" diagonal
Optimum Resolution	1600x1200
Contrast Ratio	600:1 (typ)
Viewing Angles	170° horizontal, 170° vertical
Response Time	25ms (typ)
Brightness	250 cd/m² (typ)
Glass Surface	Anti-glare

VIDEO INPUT

Analog	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
Digital	DVI-I (TMDS, 100 ohms, or analog capable)
Frequency	Fh: 30~92kHz, Fv: 50~85Hz
Sync	H/V separated, composite, sync-on-green (TTL)

COMPATIBILITY

PC	VGA up to 1600x1200 non-interlaced
Mac**	Power Mac™ G3/G4 up to 1600x1200
HDTV	480p, 720p

CONNECTOR

Analog	15-pin mini D-sub
Digital	Digital DVI-I
USB	V 2.0, Up stream (B type) x1; Down stream (A type) x4
Power	3-pin plug (CEE22)

POWER

Voltage	AC 100~240V (universal), 50~60Hz
Consumption	70W (typ)

CONTROLS

Basic	Power, 1, down, up, 2, soft power
OnView®	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (H/V frequency, resolution, model number, serial number, web site), manual image adjust (H. size, H/V position, fine tune, sharpness, scaling), setup menu (language, resolution notice, input priority, OSD position, OSD timeout, OSD background, OSD pivot), memory recall

OPERATING CONDITION

Temperature	32~104° F (0~40° C)
Humidity	10~90% (non-condensing)

DIMENSIONS (W x H x D)

Physical	476mm x 492mm x 267mm (w/ stand)
	18.7" x 19.4" x 10.5" (w/ stand)
	476mm x 369mm x 70mm (w/out stand)
	18.7" x 14.5" x 2.8" (w/out stand)

WEIGHT

Net	20.5 lbs. (9.3 kgs) w/stand; 11.5 lbs. (5.2 kgs) w/out stand
Gross	26.5 lbs. (12.0 kgs) w/stand; 13.2 lbs. (6.0 kgs) w/out stand

REGULATIONS

UL, cUL, FCC-B, CB, CE, ENERGY, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'99, NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, HYGIENIC, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S

POWER MANAGEMENT

Meets TCO'99 and ENERGY STAR® standards

WARRANTY

Three-year limited warranty on parts, labor and backlight.



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



ViewSonic®
See the difference.®

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [11117-01B-06/03] VP211b-1

For more product information, visit us on the web at ViewSonic.com

specifications