

ASRock IMB-170-V Motherboard datasheet

<http://www.manuallib.com/asrock/imb-170-v-motherboard-datasheet.html>

Socket G2 (rPGA988B) for Intel Core i7/i5/i3/Celeron (Ivy Bridge and Sandy Bridge)

Intel® QM77 Chipset

Integrated Intel® HD Graphics Built-in Visuals

Supports DDR3 1600MHz, 2 x SO-DIMM, up to 16GB system memory

2 x COM (RS-232/422/485), 4 x COM (RS-232)

D-Sub, 1 x HDMI, 1 x DisplayPort, 1 x Dual Channel 24-bit LVDS


4 x USB 3.0, 8 x USB 2.0, 2 x SATA3, 2 x SATA2

1 x PCIe 2.0 x16, 1 x mini-PCIe

Gigabit LAN : 1 x Intel 82579LM, 1 x Intel 82583V

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

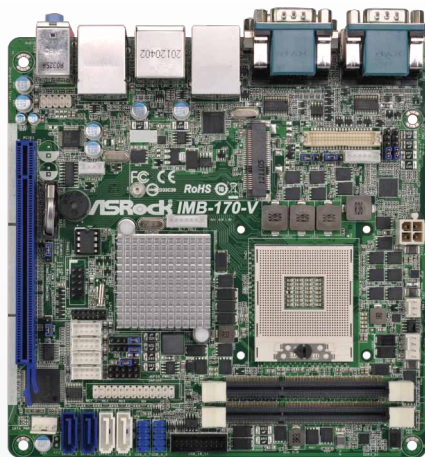

IMB-170-V

Mini-ITX Motherboard

Spotlight Features

- Socket G2 (rPGA988B) for Intel Core i7/i5/i3/Celeron (Ivy Bridge and Sandy Bridge)
- Intel® QM77 Chipset
- Integrated Intel® HD Graphics Built-in Visuals
- Supports DDR3 1600MHz, 2 x SO-DIMM, up to 16GB system memory
- 2 x COM (RS-232/422/485), 4 x COM (RS-232)
- D-Sub, 1 x HDMI, 1 x DisplayPort, 1 x Dual Channel 24-bit LVDS
- 4 x USB 3.0, 8 x USB 2.0, 2 x SATA3, 2 x SATA2
- 1 x PCIe 2.0 x16, 1 x mini-PCIe
- Gigabit LAN : 1 x Intel 82579LM, 1 x Intel 82583V

Specifications

Processor System	
Dimension	Mini-ITX (6.7-in x 6.7-in)
CPU	Socket G2 (rPGA988B) for Intel Core i7/i5/i3/Celeron (Sandy Bridge and Ivy Bridge)
Core Number	(By CPU, Max 4)
Max Speed	(By CPU)
L3 Cache	(By CPU)
Chipset	QM77
BIOS	UEFI

Expansion Slot	
PCI	0
Mini-PCIe	1 (Full size)
mSATA	0
PCIe	1 (IVY Bridge: Gen3; Sandy Bridge: Gen2)
CFast Card Socket	0

Memory	
Technology	Dual Channel DDR3 1066/1333/1600 MHz SDRAM
Max.	16GB
Socket	2 x SO-DIMM

Graphics	
Controller	Intel HD Graphics (By CPU)
VRAM	Shared Memory
VGA	Supports max resolution 2048 x 1536
LVDS	Dual channel 24-bit, max resolution 1920 x 1200@60Hz
HDMI	Supports HDMI 1.4a, max resolution 1920 x 1200
DVI	No
Display Port	Supports max resolution 2560 x 1600
Multi Display	Yes

Ethernet	
Interface	10/100/1000 Mbps
Controller	GbE LAN1: Intel 82579LM, LAN2: Intel 82583V
Connector	2 x RJ-45

SATA	
Max Data Transfer Rate	2 x SATA2 (3.0Gb/s), 2 x SATA3 (6.0Gb/s), Supports RAID 0/1/5/10

Rear I/O	
VGA	1
HDMI	1
DVI-I/D	0
Display Port	1
Ethernet	2
USB	6 (4 x USB 2.0 compliant, 2 x USB 3.0 compliant)
Audio	3 (Mic-in, Line-out, Line-in)
Serial	2 (RS-232/422/485)
PS/2	1 (Combo)


Internal Connector	
USB	6 (4 x USB 2.0 compliant, 2 x USB 3.0 compliant)
LVDS/Inverter	1/1
VGA	0
Serial	4 (RS-232)
SATA	2 x SATA2 (3.0Gb/s) + 2 x SATA3 (6.0Gb/s), Support RAID 0/1/5/10
m-SATA	0
Mini-PCIe	1
Parallel	1
IrDA	0
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1

Watchdog Timer	
Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min

Power Requirements	
Input PWR	12V DC-In (4-pin ATX PWR Con)
Power On	AT/ATX Supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready

Environment	
Operating Temperature	0°C – 60°C

Board Diagram

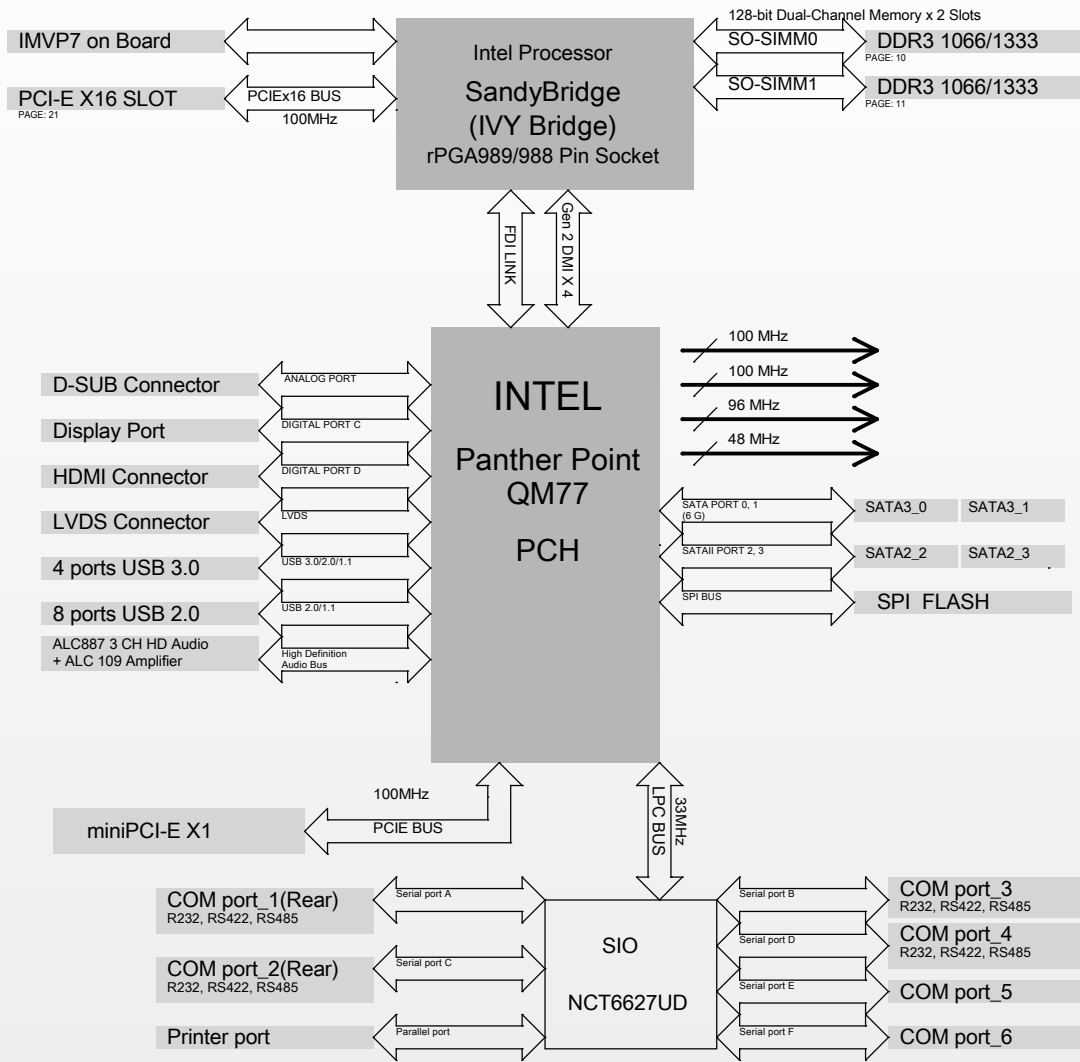

IPC Motherboards Focused Markets

ASRock IMB solutions can be widely used for industrial applications, such as process control, data acquisition, and so on. IMB-PCs are typically panel mounted and often incorporate touch screens for user interaction.



The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.